




HYD-A

LIGHT DISTRIBUTION CURVE


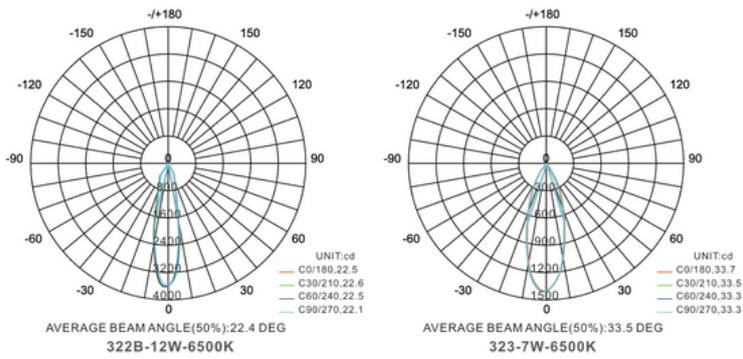


FEATURES & BENEFIT

| | |
|-------------------------|----------------------------|
| Materials of Optics | Anti Uv PC |
| Type of connection | Screwless terminal |
| Certificates | CE(EMC) LVD RoHS CB |
| Mounting type | Twist into E27 lamp holder |
| Mounting location | Ceiling |
| Application environment | Indoor |



INSTALLATION & ACCESSORIES



TECHNICAL DATA

| Item No. | Power | Voltage | Color temperature | Luminous efficacy | Size |
|----------|-------|----------|-------------------|-------------------|-----------|
| HYD-A60 | 7W | 220-240V | 3000K/4000K/6500K | 90-10 lm/w | 60*112 mm |
| HYD-A65 | 9W | 220-240V | 3000K/4000K/6500K | 90-10 lm/w | 65*124 mm |
| HYD-A70 | 12W | 220-240V | 3000K/4000K/6500K | 90-10 lm/w | 70*138 mm |