




High quality design

HYD-105C/R

LIGHT DISTRIBUTION CURVE

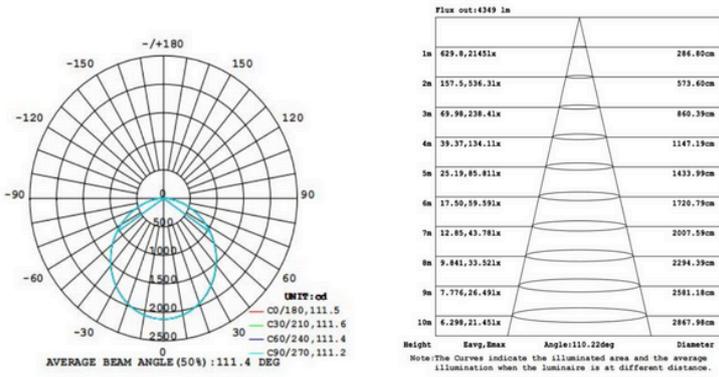


FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Holeless
Mounting location	Ceiling
Application environment	Indoor

INSTALLATION & ACCESSORIES



Surface mounted



TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-105C/R-40W	40W	220-240V	4000K/6500K	100-110 lm/w	395 *45 mm
HYD-105C/R-50W	50W	220-240V	4000K/6500K	100-110 lm/w	485*45 mm