




Long Life

HYD-116D


LIGHT DISTRIBUTION CURVE

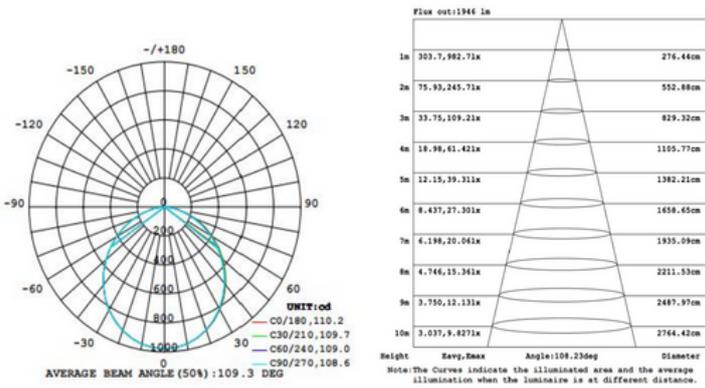

FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor

INSTALLATION & ACCESSORIES

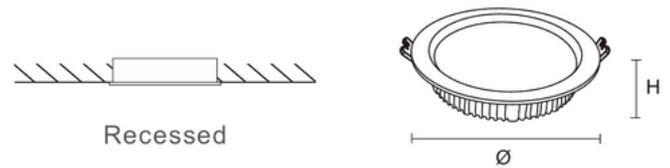

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Size	Cut-Out
HYD-116D-10W	10W	220-240V	3000K/4000K/6500K	105*30 mm	75 mm
HYD-116D-42W	42W	220-240V	3000K/4000K/6500K	230*32 mm	205 mm