



HYD-122CR




HYD-122CS



Borderless suit

HYD-122CR/S

LIGHT DISTRIBUTION CURVE

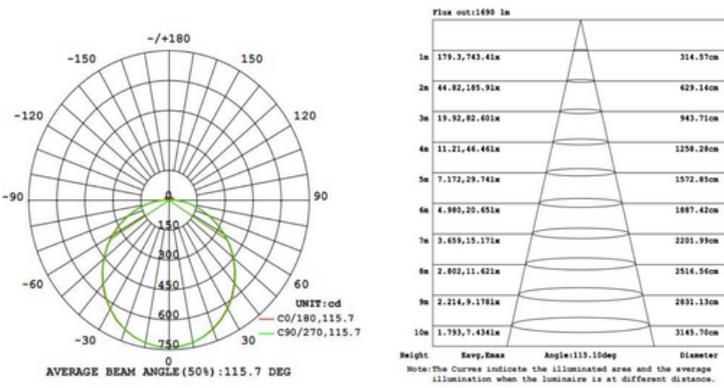



FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Holeless
Mounting location	Ceiling
Application environment	Indoor

INSTALLATION & ACCESSORIES



Surface mounted

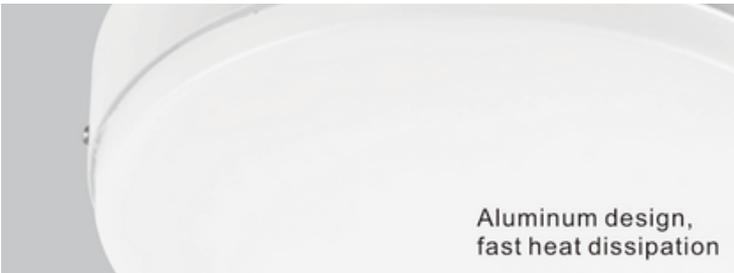

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-122CR/S-20W	20W	220-240V	4000K/6500K	110-120 lm/w	175*50 mm
HYD-122CR/S-30W	30W	220-240V	4000K/6500K	110-120 lm/w	225*50 mm
HYD-122CR/S-40W	40W	220-240V	4000K/6500K	110-120 lm/w	300*50 mm