




Wide exposure range

HYD-130

LIGHT DISTRIBUTION CURVE

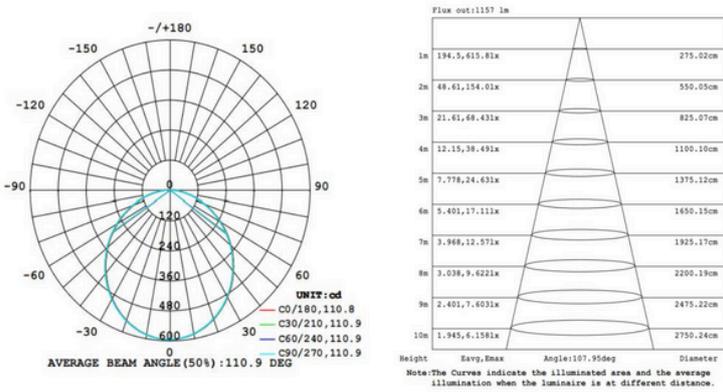


FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Materials of Housing	PC
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Surface mounted
Mounting location	Ceiling
Application environment	Indoor

INSTALLATION & ACCESSORIES



Surface mounted



TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-130	18W	220-240V	4000K/6500K	100-110 lm/w	280 *55 mm

