




IP20/IP44/IP54  
Dust and moisture proof

# HYD-216R


## LIGHT DISTRIBUTION CURVE

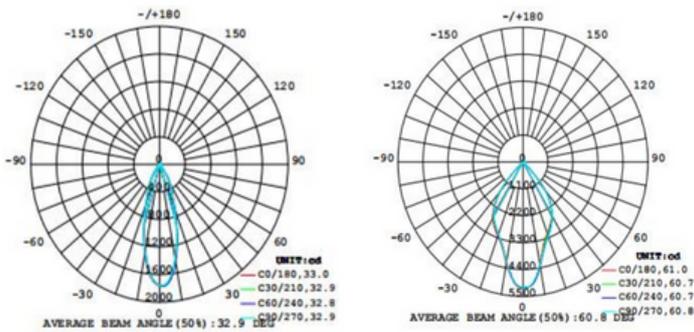

## FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
IP Rating	IP54

## INSTALLATION & ACCESSORIES

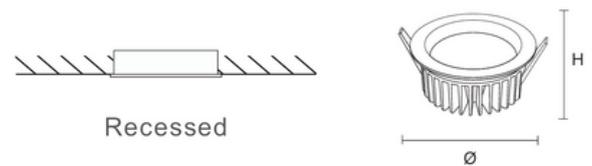

## TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Size	Cut-Out
HYD-216R-7W	7W	220-240V	3000K/6500K	95*55 mm	75 mm
HYD-216R-15W	15W	220-240V	3000K/6500K	145*75 mm	120 mm
HYD-216R-20W	20W	220-240V	3000K/6500K	170*75 mm	145 mm
HYD-216R-40W	40W	220-240V	3000K/6500K	230*110 mm	205 mm
HYD-216R-60W	60W	220-240V	3000K/6500K	230*120 mm	205 mm
HYD-216R-80W	80W	220-240V	3000K/6500K	230*128 mm	205 mm