




Special material of reflectors (4 different colors to choice)

HYD-219C


LIGHT DISTRIBUTION CURVE

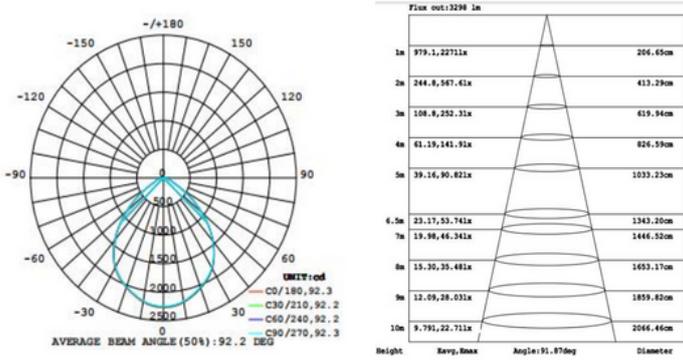

FEATURES & BENEFIT

Materials of Optics	PC
Materials of Housing	Aluminum
Certificates	CB CE LVDEMC
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor

INSTALLATION & ACCESSORIES

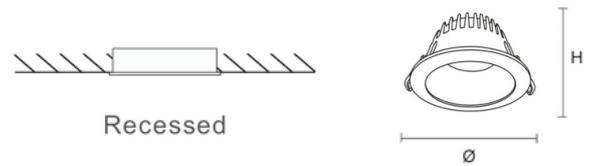

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Size	Cut-Out
HYD-219C-7W	7W	220-240V	3000K/4000K/6500K	88*45 mm	75 mm
HYD-219C-15W	15W	220-240V	3000K/4000K/6500K	130*70 mm	110 mm
HYD-219C-20W	20W	220-240V	3000K/4000K/6500K	165*90 mm	145 mm
HYD-219C-40W	40W	220-240V	3000K/4000K/6500K	220*105 mm	195 mm
HYD-219C-50W	50W	220-240V	3000K/4000K/6500K	220*105 mm	195 mm