




HYD-226GR



HYD-226GS

HYD-226GR/S


LIGHT DISTRIBUTION CURVE

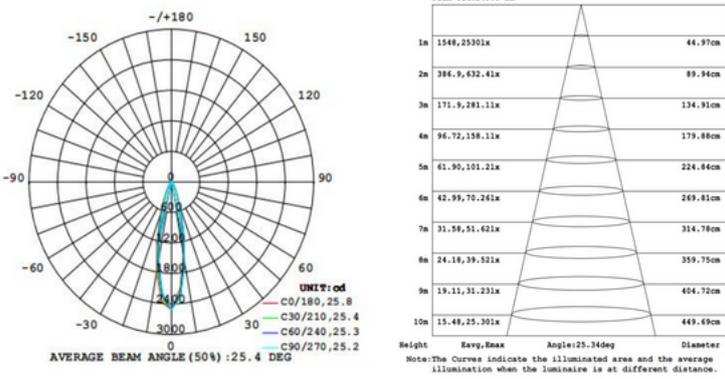

FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Holeless
Mounting location	Ceiling
Application environment	Indoor

INSTALLATION & ACCESSORIES

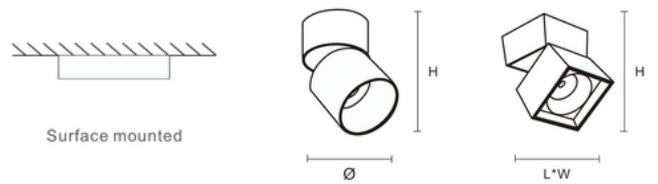

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-226GR-15W	15W	220-240V	3000K/6500K	80-90 lm/w	80*110 mm
HYD-226GS-15W	15W	220-240V	3000K/6500K	80-90 lm/w	80*110 mm

