




Cover the light source design
Reduce the discomfort caused
by direct light sources

HYD-240R



LIGHT DISTRIBUTION CURVE

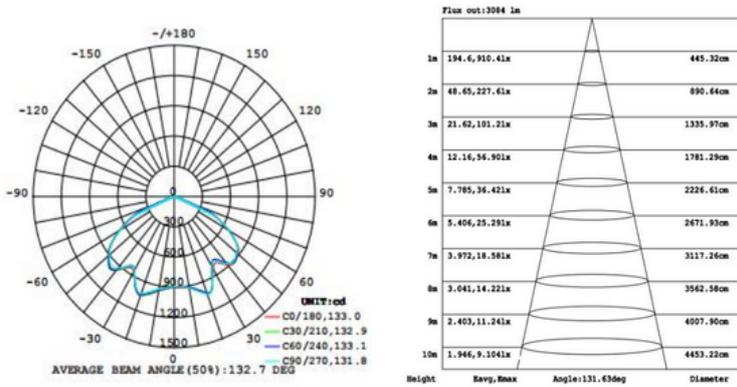

FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor

INSTALLATION & ACCESSORIES



TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Size	Cut-Out
HYD-240R-7W	7W	220-240V	3000K/4000K/6500K	90*46 mm	75 mm
HYD-240R-20W	20W	220-240V	3000K/4000K/6500K	170*46 mm	140 mm
HYD-240R-32W	32W	220-240V	3000K/4000K/6500K	225*46 mm	190 mm