


Long life,  
no discoloration

# HYD-258S


## LIGHT DISTRIBUTION CURVE

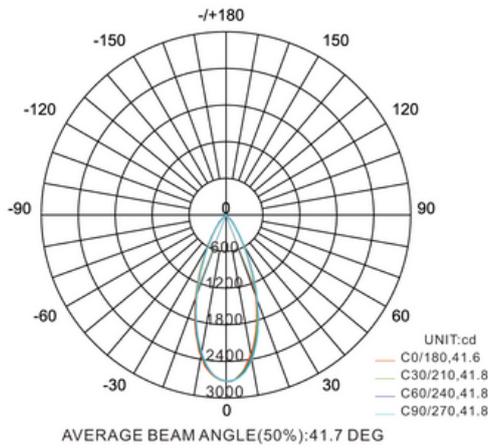

## FEATURES & BENEFIT

Materials of Optics	PC
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
IP Rating	IP65

## INSTALLATION & ACCESSORIES

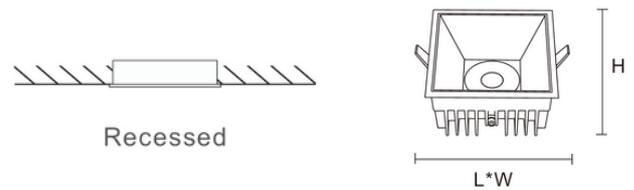

## TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Size	Cut-Out
HYD-258S-35W	35W	220-240V	3000K/6500K	158*158*96 mm	145*145 mm

