




HYD-288

LIGHT DISTRIBUTION CURVE

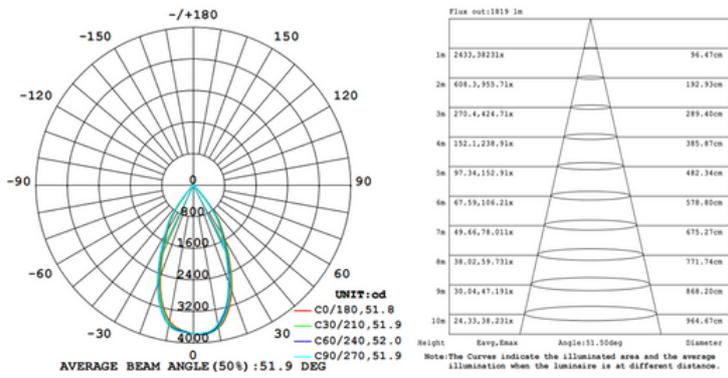

FEATURES & BENEFIT


Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Surface mounted/Hanging
Mounting location	Ceiling/hanging
Application environment	Indoor



INSTALLATION & ACCESSORIES



Surface mounted



TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-288-01-24W	24W	220-240V	3000K/4000K/6500K	92 lm/w	102*150 mm
HYD-288-02-30W	30W	220-240V	3000K/4000K/6500K	100 lm/w	120*150 mm