




**IP65**  
Dust and moisture proof

# HYD-315C



## LIGHT DISTRIBUTION CURVE

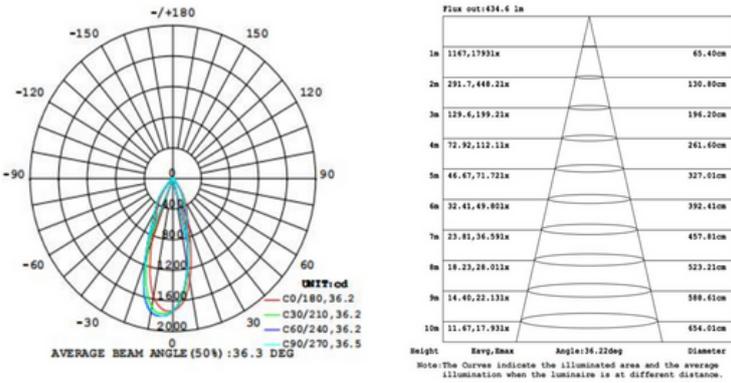

## FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Surface mounted
Mounting location	Ceiling
Application environment	Indoor/Outdoor
IP Rating	IP65

## INSTALLATION & ACCESSORIES



## TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
315C-12W	12W	220-240V	3000K/6500K	90-100 lm/w	80*80 mm
315C-18W	18W	220-240V	3000K/6500K	90-100 lm/w	95*90 mm

