




HYD-322B

# HYD-322B

## LIGHT DISTRIBUTION CURVE

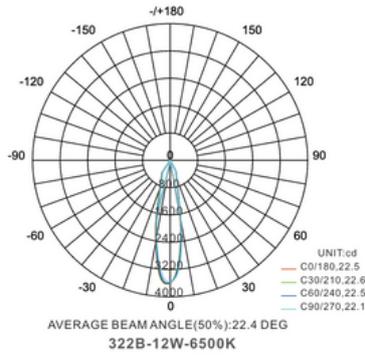


## FEATURES & BENEFIT

Materials of Optics	Anti Uv PMMA, Glass (323)
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor

## INSTALLATION & ACCESSORIES



Recessed



## TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Size	Cut-Out
HYD-322B-12W	12W	220-240V	3000K/4000K	90*70 mm	75 mm