




Special material of reflectors (5 different colors to choice)

HYD-324



LIGHT DISTRIBUTION CURVE

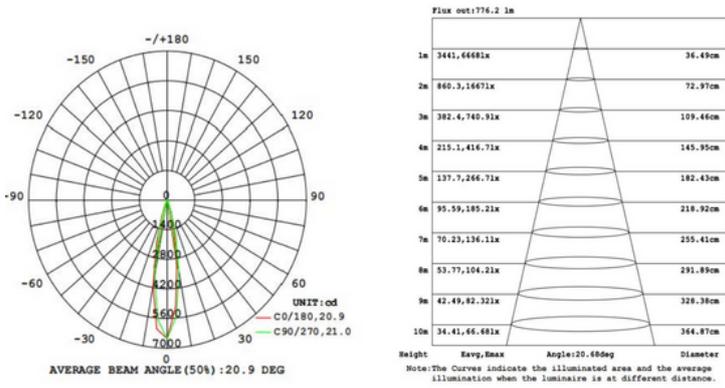

FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Reflection	Anti-glare

INSTALLATION & ACCESSORIES



TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Size	Cut-Out
HYD-324-7W	7W	220-240V	3000K/4000K/6500K	68*54 mm	60 mm
HYD-324-12W	12W	220-240V	3000K/4000K/6500K	87*82 mm	75 mm
HYD-324-20W	20W	220-240V	3000K/4000K/6500K	105*100 mm	95 mm