



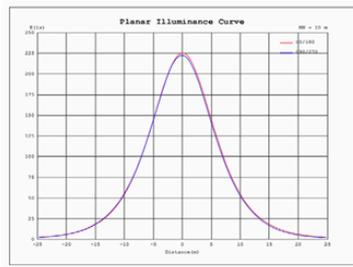

HYD-425A


LIGHT DISTRIBUTION CURVE



FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Suspension
Mounting location	Underground/Wall/Ceiling
Application environment	Indoor/Outdoor
IP Rating	IP65

INSTALLATION & ACCESSORIES

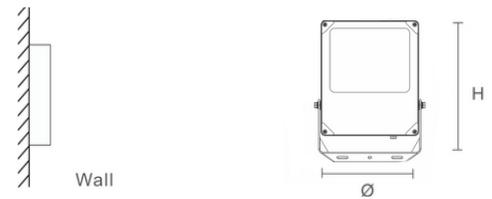

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficacy	Size
HYD-425A	200W	220-240V	3000K/4000K	27921 lm	456*390*55 mm

