



HYD-L03-ES

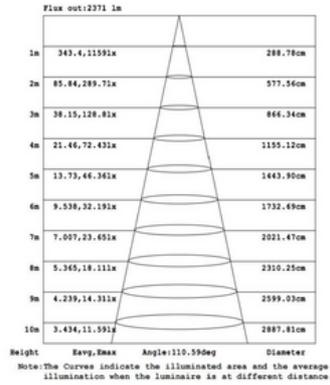

Stereo Light


LIGHT DISTRIBUTION CURVE

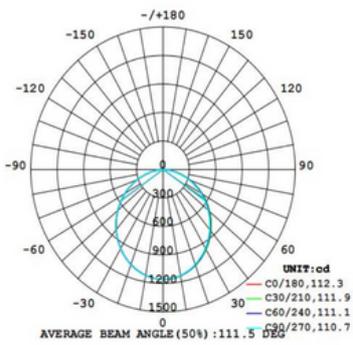

FEATURES & BENEFIT

| | |
|-------------------------|---------------------|
| Materials of Optics | Glass |
| Materials of Housing | Aluminum |
| Certificates | CE(EMC) LVD RoHS CB |
| Mounting type | Surface mounted |
| Mounting location | Ground/Lawn |
| Application environment | Outdoor |
| IP Rating | IP65 |

INSTALLATION & ACCESSORIES

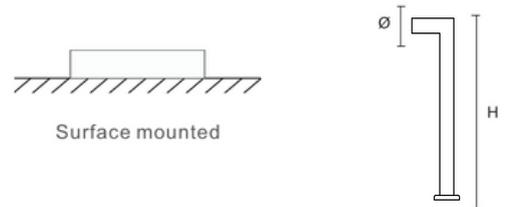

TECHNICAL DATA

| Item No. | Power | Voltage | Color temperature | Luminous efficiency | Size |
|------------|-------|----------|-------------------|---------------------|--------------------|
| HYD-L03-ES | 10W | 220-240V | 3000K | 80-90 lm/w | 150*50*100*600 mm |
| HYD-L03-ES | 10W | 220-240V | 3000K | 80-90 lm/w | 150*50*100*1000 mm |