


# HYD-L03-QR



Bright light effect



## LIGHT DISTRIBUTION CURVE

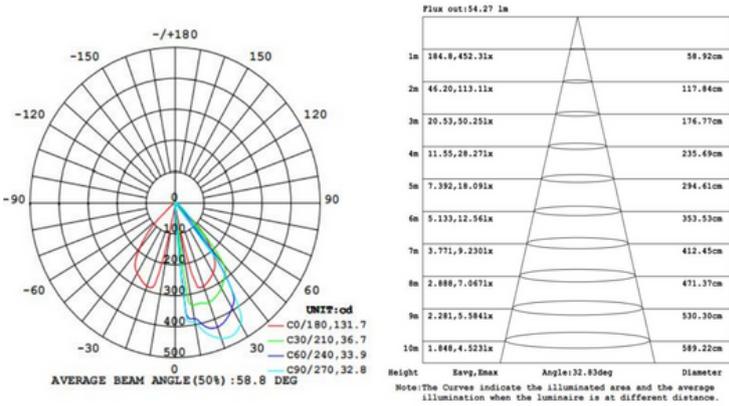

## FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Surface mounted
Mounting location	Ground/Lawn
Application environment	Outdoor
IP Rating	IP65

## INSTALLATION & ACCESSORIES

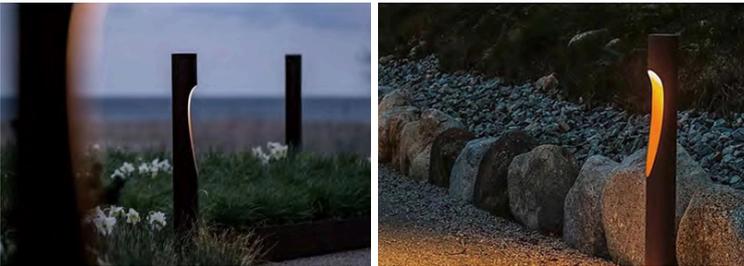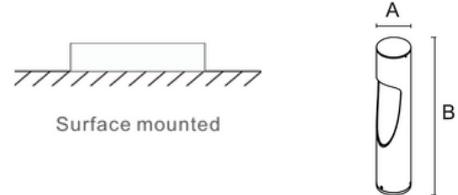

## TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-L03-QR	10W	220-240V	3000K	80-90 lm/w	120*450 mm
HYD-L03-QR	10W	220-240V	3000K	80-90 lm/w	120*600 mm
HYD-L03-QR	10W	220-240V	3000K	80-90 lm/w	120*800 mm