




HYD-SL-16



IP66
Water and dust resistant


LIGHT DISTRIBUTION CURVE

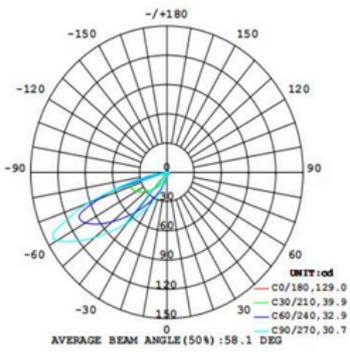

FEATURES & BENEFIT

Materials of Optics	PC
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Recessed
Mounting location	Wall/Step
Application environment	Indoor/Outdoor
IP Rating	IP65

INSTALLATION & ACCESSORIES

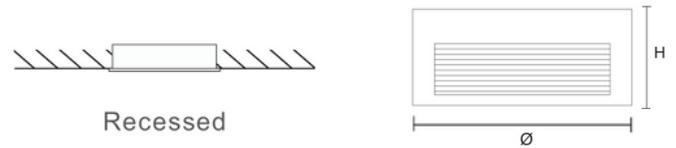

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficacy	Size
HYD-SL-16	5W	220-240V	3000K	70-80 lm/w	135*50*55 mm