




HYD-ST-056/57/58

LIGHT DISTRIBUTION CURVE

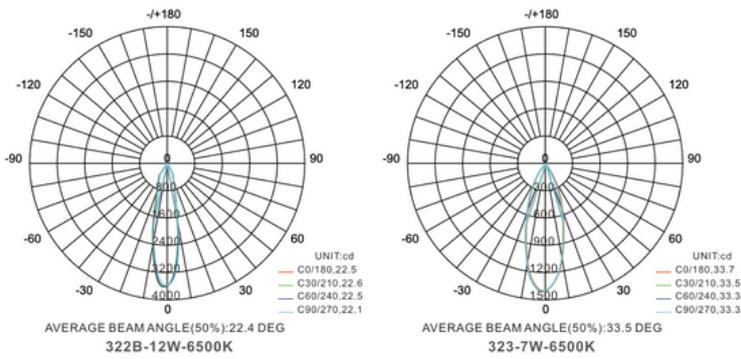

FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Type of connection	Screwless terminal
Certificates	CE(EMC) LVD RoHS CB
Mounting location	Ceiling/wall
Application environment	Indoor/Outdoor
IP Rating	IP65



TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-ST-056	9.5W	220-240V	3000K/4000K	45-50 lm/w	8 mm*50 m
HYD-ST-057	9.5W	220-240V	3000K/4000K	45-50 lm/w	8 mm*50 m
HYD-ST-058	9.5W	220-240V	3000K/4000K	45-50 lm/w	8 mm*50 m