



HYD-ST-010



HYD-ST-002





HYD-ST-020



HYD-ST-003

# HYD-ST

## LIGHT DISTRIBUTION CURVE

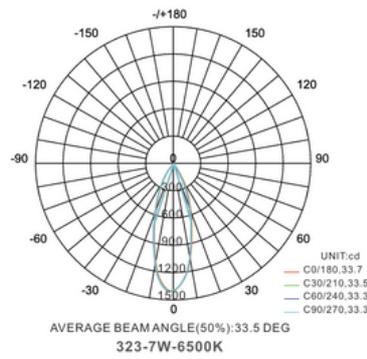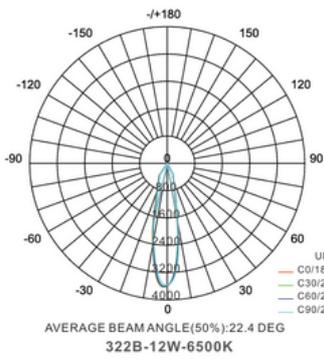

## FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Type of connection	Screwless terminal
Certificates	CE(EMC) LVD RoHS CB
Mounting location	Ceiling/wall
Application environment	Indoor
IP Rating	IP65



## TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	IP Rating	Luminous efficiency	Meter Quantity
HYD-ST-002	10W	24V	3000K/4000K/6500K	IP20	100-105 lm/w	120D ea/m
HYD-ST-003	9W	220-240V	3000K/4000K/6500K	IP65	90-95 lm/w	120D ea/m
HYD-ST-004	10W	220-240V	3000K/4000K/6500K	IP65	115-120 lm/w	180D ea/m
HYD-ST-010	10W	24V	3000K/4000K/6500K	IP20	95-100 lm/w	320D ea/m
HYD-ST-020	10W	24V	3000K/4000K/6500K	IP65	90 lm/w	120D ea/m