




IP65  
Water and dust resistant

# HYD-T12

## LIGHT DISTRIBUTION CURVE

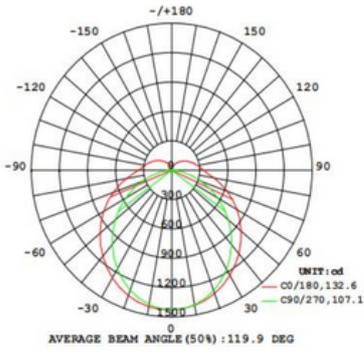

Flux out: 2958 lm


Height	Ray, Max	Angle: 106.66deg	Diameter
1m	461.6, 1433lx		269.53cm
2m	315.4, 358.3lx		537.06cm
3m	51.29, 159.3lx		805.59cm
4m	28.85, 89.59lx		1074.12cm
5m	18.46, 57.34lx		1342.65cm
6m	12.82, 39.82lx		1611.18cm
7m	9.425, 29.25lx		1879.71cm
8m	7.212, 22.49lx		2148.23cm
9m	5.699, 17.70lx		2416.76cm
10m	4.616, 14.33lx		2685.29cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

## FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Suspension/Surface mounted
Mounting location	Ceiling
Application environment	Parking and indoor
IP Rating	IP65

## INSTALLATION & ACCESSORIES



## TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-T12-40W	40W	220-240V	4000K/6500K	100 lm/w	1200*55*52.8 mm

