



HYD-W20B




HYD-W20C



HYD-W20D

# HYD-W20B/C/D


## LIGHT DISTRIBUTION CURVE

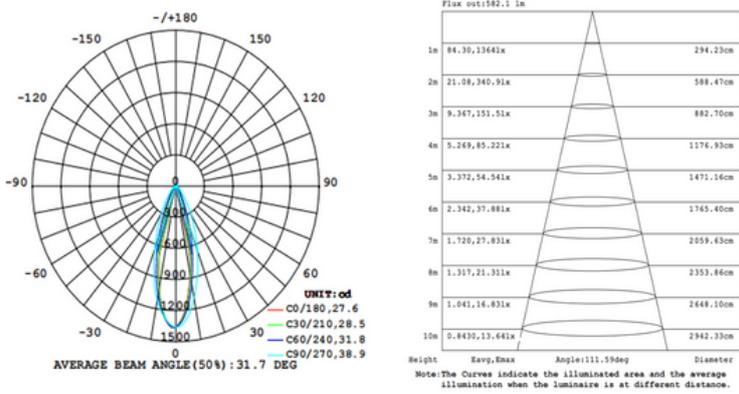

## FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Surface mounted
Mounting location	Wall
Application environment	Indoor/Outdoor
IP Rating	IP65

## INSTALLATION & ACCESSORIES

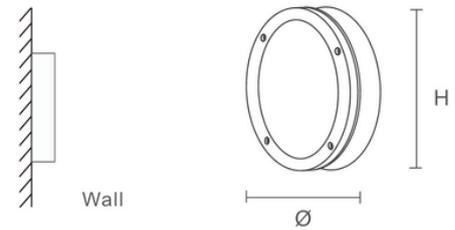

## TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficacy	Size
HYD-W20B	11W	220-240V	3000K	90-100 lm/w	220*71 mm
HYD-W20C	11W	220-240V	3000K	90-100 lm/w	220*73 mm
HYD-W20D	11W	220-240V	3000K	90-100 lm/w	220*76 mm