




IP65
Water and dust resistant

HYD-W26

LIGHT DISTRIBUTION CURVE

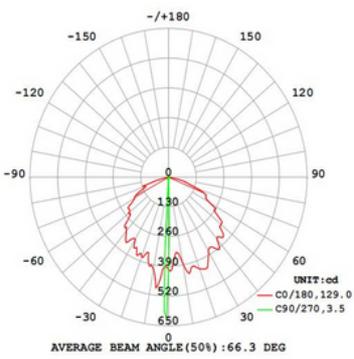

Flux out: 1.436 lm


Height	Eavg, Emax	Angle: 3.55deg	Diameter
1m	374.8, 649.4lx		6.19cm
2m	93.70, 162.4lx		12.39cm
3m	41.64, 72.16lx		18.58cm
4m	23.42, 40.59lx		24.77cm
5m	14.99, 25.98lx		30.97cm
6m	10.41, 18.04lx		37.16cm
7m	7.649, 13.25lx		43.35cm
8m	5.856, 10.15lx		49.55cm
9m	4.627, 8.017lx		55.74cm
10m	3.748, 6.494lx		61.93cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Chips	Eagleris & CREE
Mounting type	Surface mounted
Mounting location	Wall
Application environment	Indoor/Outdoor
IP Rating	IP65

INSTALLATION & ACCESSORIES

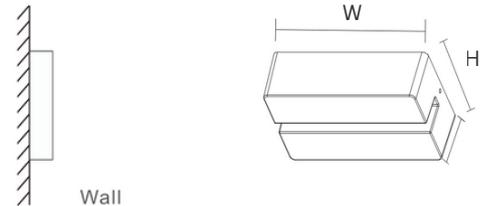

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficacy	Size
HYD-W25	2*6.5W	220-240V	3000K	48.6 lm/w	155*90*46 mm