



HYD-O1





HYD-O2

HYD-O1/O2



IP65
Waterproof and dustproof



LIGHT DISTRIBUTION CURVE

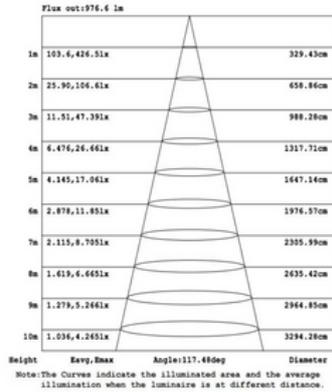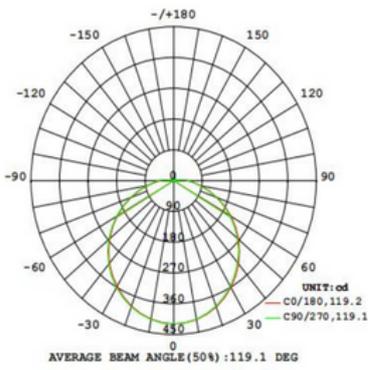

FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Suspension
Mounting location	Ceiling
Application environment	Indoor/Outdoor
IP Rating	IP65

INSTALLATION & ACCESSORIES



TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficacy	Size
HYD-O1-20W	20W	220-240V	3000K/4000K	100-120 lm/w	220*66.5 mm
HYD-O2-20W	20W	220-240V	3000K/4000K	100-120 lm/w	144*270*68.5 mm