




HYD-613A




HYD-613B



Colour temperature selectable: 3K, 4K & 6.5K

# HYD-613-3IN1

## LIGHT DISTRIBUTION CURVE

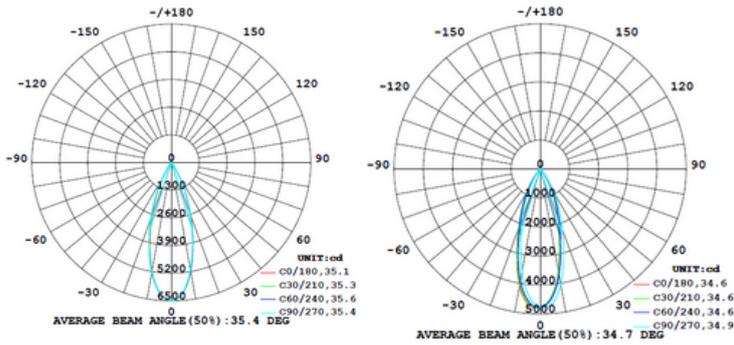


## FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Track mounting
Mounting location	Ceiling
Application environment	Indoor



## INSTALLATION & ACCESSORIES

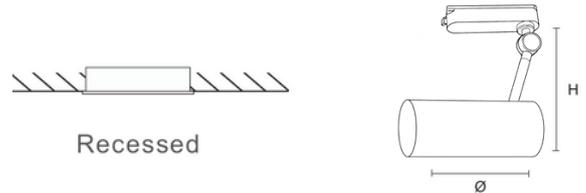

## TECHNICAL DATA

Item No.	Body colour	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-613A	Black/White	30W	220-240V	3000K/4000K/6500K	60-70 lm/w	70*160 mm
HYD-613B	Black/White	38W	220-240V	3000K/4000K/6500K	65-75 lm/w	80*160 mm

## INSTALLATION OPTIONS

