



HYD-L01-C




HYD-L01-D



HYD-L01-F

HYD-L01-C/D/F



LIGHT DISTRIBUTION CURVE

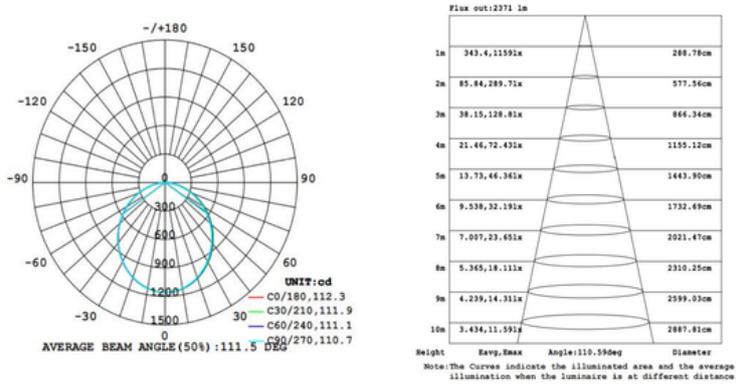

FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Put
Mounting location	Lawn
Application environment	Indoor/outdoor
IP Rating	IP65

INSTALLATION & ACCESSORIES



TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-L01C-5W	5W	220-240V	3000K	100 lm/w	50*125*292 mm
HYD-L01C-10W	10W	220-240V	3000K	100 lm/w	64*138*310 mm
HYD-L01D-20W	20W	220-240V	3000K	100 lm/w	64*138*310 mm
HYD-L01F-10W	10W	220-240V	3000K	100 lm/w	64*185*385 mm