




HYD-L01-C2



LIGHT DISTRIBUTION CURVE

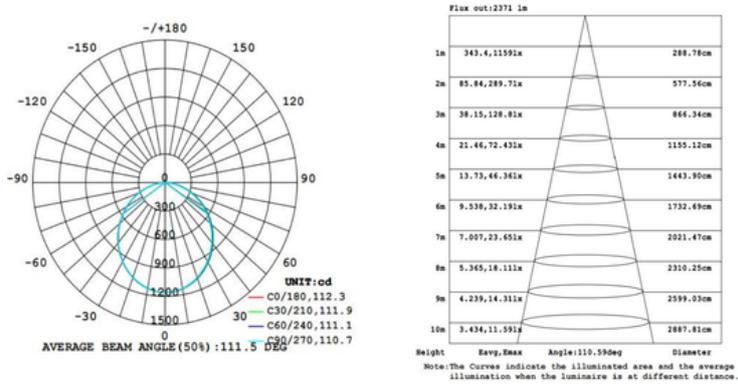

FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Put
Mounting location	Underground
Application environment	Indoor/outdoor
IP Rating	IP65

INSTALLATION & ACCESSORIES



TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-L01C2-10W	10W	220-240V	3000K	100 lm/w	64*145 mm
HYD-L01C2-20W	20W	220-240V	3000K	100 lm/w	90*170 mm

