




HYD-T21



IP65
Water and dust resistant


LIGHT DISTRIBUTION CURVE

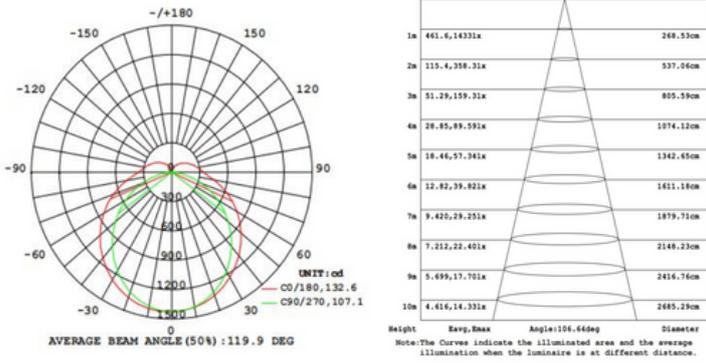

FEATURES & BENEFIT

| | |
|-------------------------|----------------------------|
| Materials of Optics | Anti Uv PC |
| Materials of Housing | Aluminum |
| Certificates | CE(EMC) LVD RoHS CB |
| Mounting type | Suspension/Surface mounted |
| Mounting location | Ceiling |
| Application environment | Parking and indoor |
| IP Rating | IP65 |

INSTALLATION & ACCESSORIES

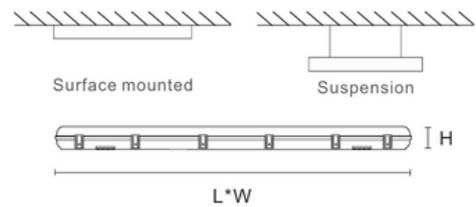

TECHNICAL DATA

| Item No. | Power | Voltage | Color temperature | Luminous efficiency | Size |
|-------------|-------|----------|-------------------|---------------------|-----------------|
| HYD-T12-40W | 40W | 220-240V | 4000K/6500K | 100 lm/w | 1200*55*52.8 mm |

